


# AIR-CARGO EQUIPMENT

24 h-delivery-Service to: MUC-FRA-NUE-HHN-LEJ-THF-SXF-CGN-DUS-LUX-LGG (B)



## Thermofilm

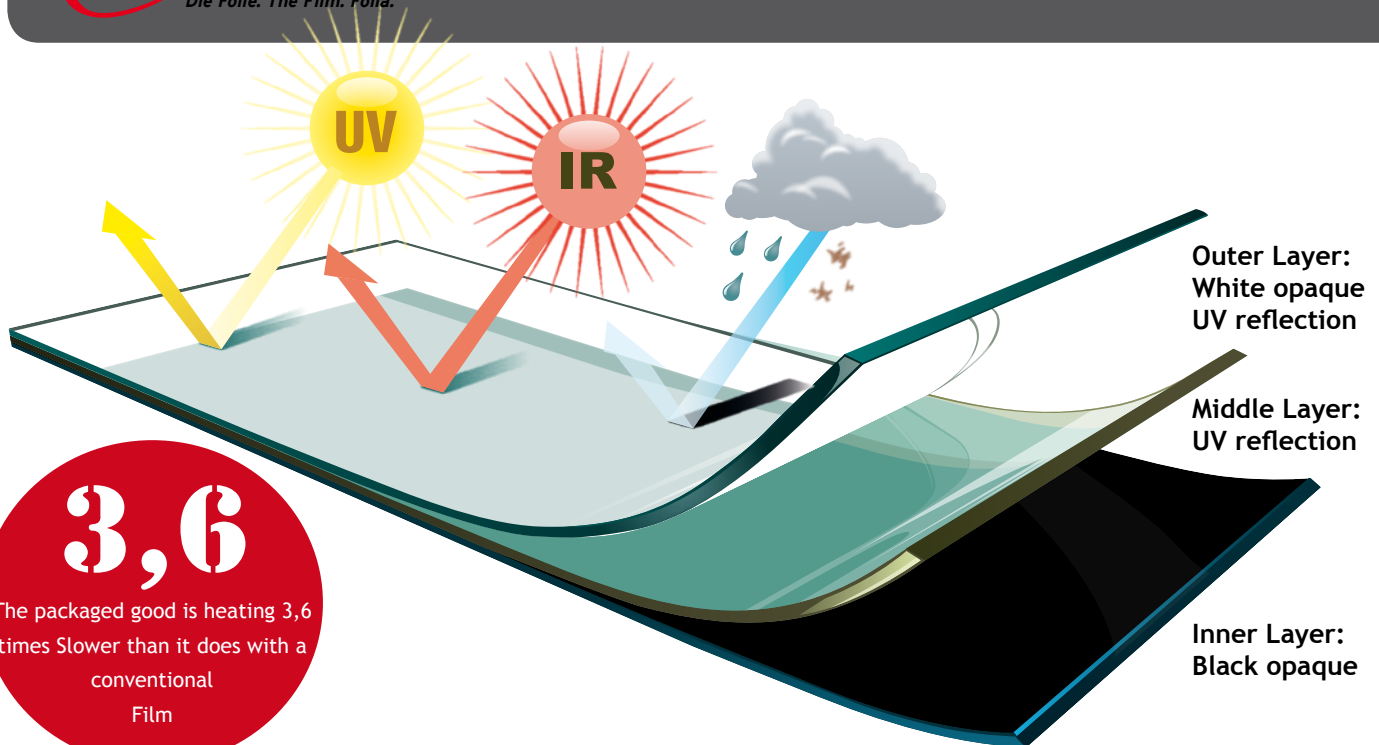

Outer Layer:  
White opaque  
UV reflection

Middle Layer:  
UV reflection

Inner Layer:  
Black opaque

### Material description:

3-Layer co-extruded Polyethylene.

Outer Layer white / Inner Layer black

### Special Features:

- Sunlight reflecting surface
- Handling like normal cargo film
- More attractive price than Thermo-Covers
- Particularly suitable for heat-sensitive goods
- Usual high tear strength of the Verpalin®

Air Cargo Film quality

### Further film properties:

Thickness: 45 microns  
Width: 6 m  
(folded 1,6m)  
Core: 50 mm

Due to the specific structure and the intensive coloring of the film, the heating of the packaged good delays below the film.

## FACT

Laboratory tests have shown, that by using this special Verpalin® Thermofilm a packaged good is heating 3,6 times slower than it does with a conventional film.

In the test series, we measured a temperature of 22 degrees below the film on a pallet and put the packaged good directly into the sunlight.

- Underneath the conventional transparent film we reached a temperature of 35 degrees in 1h 5 min.

- With our new developed Verpalin® Thermofilm we reached this temperature not before 3h 55 min.



GR Handelsvertretung GmbH  
Alemannstraße 11 C  
85095 Denkendorf  
GERMANY

Phone: +49 8821 8424  
Fax: +49 8821 8426  
E-Mail: [aircargoequipment@aol.com](mailto:aircargoequipment@aol.com)  
WWW: [aircargoequipment24.de](http://aircargoequipment24.de)